

Double throttle check valve, sea water resistant Type Z2FS 16 ...J

Nominal size 16 Series 3X

Features of the sea water resistant version

When compared to the standard version the following modifications have been carried out:

- The external metal components, housing and plugs, have been zinc galvanised or anti-corrosion protected.
- The adjustment is protected against corrosion by a cap.
- Sea water resistance is identified by the code "J" in the ordering code.


Note:

Valve fixing screws must be ordered separately:

- 4 off M10, DIN 912-10.9 NEL¹⁾; $M_A = 75$ Nm; order in clear text, length details as required.
- 2 off M6, DIN 912-10.9 NEL¹⁾; $M_{\Delta} = 15.5$ Nm; order in clear text, length details as required.

Further information can be obtained from the standard documentation RE 27 526.

Ordering details, preferred types

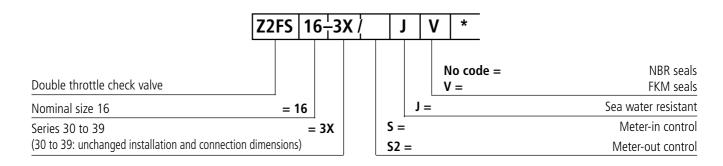

Preferred types	
Туре	Material number
Z2FS 16-3X/SJ	00419300
Z2FS 16-3X/S2J	00476035
Z2FS 16-3X/S2JV	00417999



Z2FS 16 ...J **1**/2

¹⁾ The code "NEL" stands for "non-electrolytically applied zinc coatings" which contain a lubrication additive for the reduction of frtiction in accordance with ISO/WD 10683. Colour: silver.

Notes

Mannesmann Rexroth AG Rexroth Hydraulics

D-97813 Lohr am Main
Jahnstraße 3-5 • D-97816 Lohr am Main
Telefon 0 93 52 / 18-0
Telefax 0 93 52 / 18-23 58 • Telex 6 89 418-0

eMail product.support@rexroth.de Internet www.rexroth.com

Mannesmann Rexroth Limited

Cromwell Road, St Neots, Cambs, PE19 2ES Tel: 0 14 80/22 32 56 Fax: 0 14 80/21 90 52 E-mail: info@rexroth.co.uk

The specified data is for product description purposes only and may not be deemed to be guaranteed unless expressly confirmed in the contract.

All rights reserved – Subject to revision